

WC100


Waterproof Wire Connectors

KEY BENEFITS

- 100% silicone-based sealant protects against moisture and corrosion
- Designed as a single-use only connection
- UL Listed for 600 V and 486G for use in damp/wet locations or above-grade applications
- Easy to apply, pre-filled twist-on wire connectors
- Eliminates the need for heat-shrink or excessive taping
- Not for use in continual submersion applications, use DBRY-6
- Approvals: UL, cUL, FCC, CE, RCM, RoHS, ISED

OPERATING SPECIFICATIONS

- Height: 3.5 cm
- Minimum wire: 3 #0.8 mm²
- Maximum wire: 2 #6 mm² with 1 #3 mm²

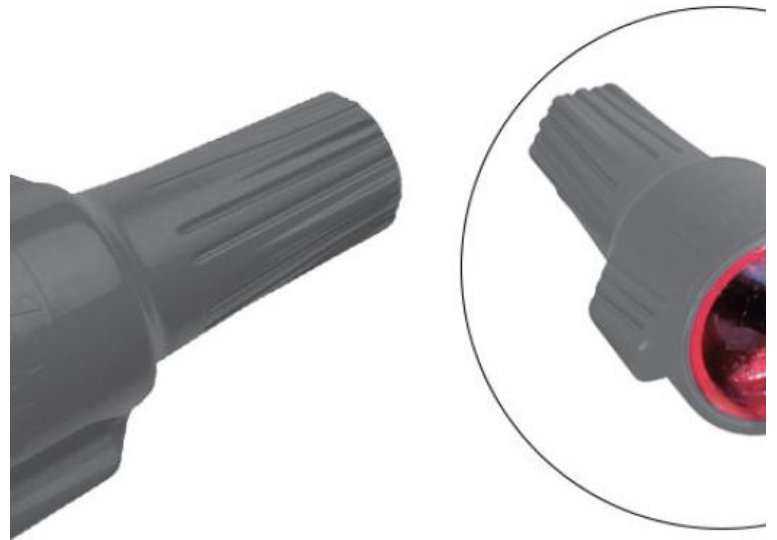

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://redesign.hunterindustries.com/en-metric/irrigation-product/accessories/wc100>
051824