

# Data Retrieval Unit

Come rain or come shine, Data Retrieval delivers with maximum efficiency

## KEY BENEFITS

- Up to 6 sensors per unit and 16 units per system
- Powerful software functions in Surveyor™ for custom alarm reporting
- Stop watering based on adjustable wind speed and direction parameters
- All-weather lockable wall-mount metal cabinet
- Data monitored live or stored in non-volatile memory

## ELECTRICAL SPECIFICATIONS

- Input Power: 105-125 VAC, 60 Hz at ½ amp maximum
- Input Power SV Version: 205-230 VAC, 50 Hz at ½ amp maximum

## SIGNAL OUTPUT


- Wireless: UHF (450-470 MHz) 2 watt narrow-band radio
- Wired: Uses Hunter GCBL cable
- Use RASREM remote antenna with Radio Data Retrieval Unit, supplied separately

## OPTIONS

- SV: 230 VAC, 50 Hz

## SENSORS

- GENDATAN = Wind speed & direction
- GENDATFL = Flow sensor
- GENDATRC = Rain gauge
- Mini-Click = Rain sensor
- Wind-Click = Wind sensor
- Freeze-Click = Freeze sensor
- MWS = Mini weather station  
(Combines mini, wind- and freeze-clicks)

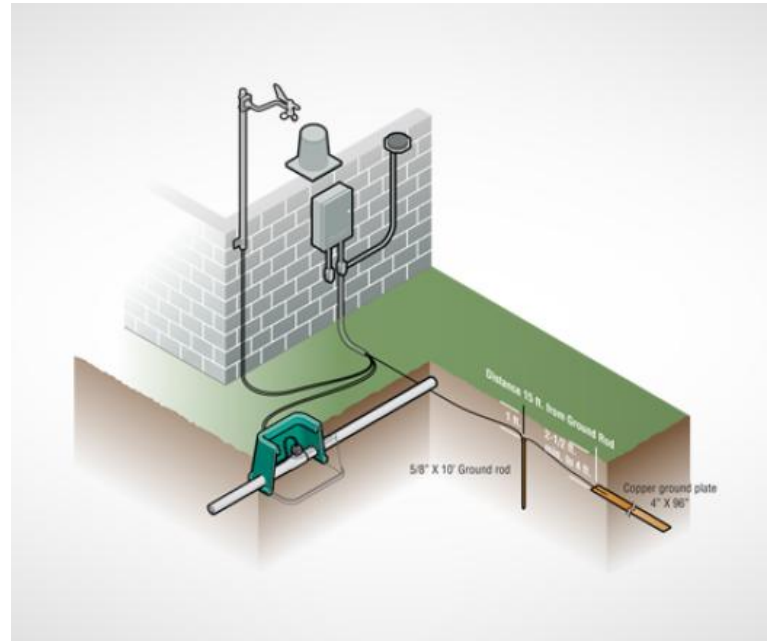



**DAT**

Height	40.6 cm
Width	31.1 cm
Depth	12.1 cm

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://redesign.hunterindustries.com/en-metric/irrigation-product/previous-models/data-retrieval-unit-052524>